

Honeywell

121825AA CRANK ARM ASSEMBLY

APPLICATION

The crank arm assembly provides the means to attach a Q298 linkage to the M835 motor. The linkage is used to control a remote mounted duct damper blade.

INSTALLATION

To install the crank arm assembly refer to the illustration on page 2 and proceed as follows:

1. Remove the M835 cover.
2. Attach the shaft assembly to the M835 power arm with the two 3/16 in. screws.
3. Remove plastic knockout in the cover.
4. Remount cover.
5. Attach the Q298 linkage to the crank arm.
6. Attach the crank arm to the shaft assembly. Firmly mount with the 5/16 in. screw.



Energy Products Center


M.W.
Rev. 9-82•

Form Number

95-5934—1

NOTE: Make certain the crank is correctly positioned according to the instructions supplied with the duct damper blade. The crank arm is adjustable to 12 positions.

To reposition: remount the crank arm on the shaft assembly or change the screw in the crank arm assembly to one of the other 3 holes.

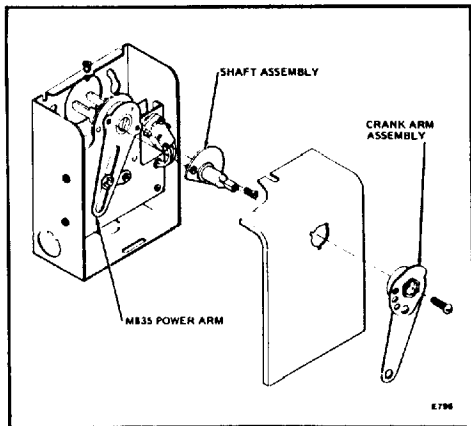

HONEYWELL MINNEAPOLIS, MN 55408 INTERNATIONAL Sales Offices in all principal cities of the world. Manufacturing in Australia, Canada, Finland, France, Germany, Japan, Mexico, Netherlands, Spain, Taiwan, United Kingdom, U.S.A.

PRINTED IN MEXICO