

AprilAire®

Air Cleaner

SUBMITTAL SHEET

2000 Series

Whole-Home Air Cleaners

Project: _____

Dealer: _____

Architect: _____

Engineer: _____

Contractor: _____

Location: _____

Suppliers: _____

Date: _____




SPECIFICATIONS

Air flow capacity	Up to 2000 CFM maximum
Max. equipment weight	Cabinet supports 400 lbs. static load
Air Cleaner operating environment	0°F - 140°F
Humidity	0-90% non-condensing
CABINET	
Assembly	Preassembled
Outer housing	22 gauge, galvanized painted cabinet door
Door	Self-aligning door; snaps into place
Classification	UL Listed

HEALTHY AIR 13 (INCLUDED)


Size (microns)	Efficiency
0.3-1.0 Microns	63%
1.0-3.0 Microns	88%
3.0-10 Microns	93%

- Collapsible Healthy Air MERV 13 filters with integrated self-spacing pleats
- SelfSeal™ Technology dramatically reduces air bypass, improving media performance
- Healthy Air 13 filters available for all models (sold separately)
- Healthy Air 13+ and Healthy Air 16 filters also available for 2210 and 2410 air cleaners

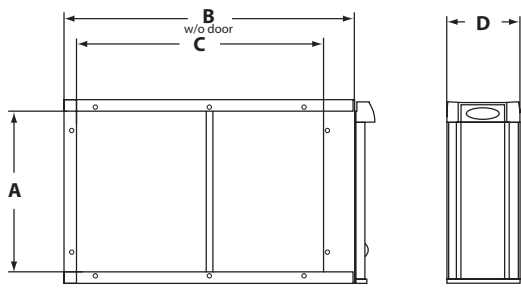

Outlet side furnace connection

Front

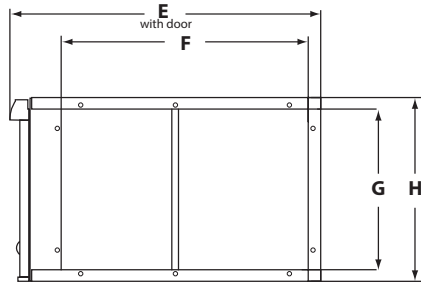

Inlet side return duct connection

		Nominal Size (in inches)	Replacement Media	Shipping Weight	Resistance @ Airflow Volume (inches w.c. @CFM)	Filtering Media Area
MODELS	2210	20 x 25	Model 213	18 lbs.	.02" @ 200 .15" @ 1200 .04" @ 400 .19" @ 1400 .06" @ 600 .23" @ 1600 .09" @ 800 .27" @ 1800 .12" @ 1000 .31" @ 2000	28.0 sq. ft.
	2310	20 x 20	Model 313	15 lbs.	.03" @ 200 .13" @ 800 .05" @ 400 .17" @ 1000 .09" @ 600 .23" @ 1200	21.3 sq. ft.
	2410	16 x 25	Model 413	17 lbs.	.02" @ 200 .17" @ 1200 .05" @ 400 .22" @ 1400 .07" @ 600 .26" @ 1600 .10" @ 800 .31" @ 1800 .14" @ 1000 .37" @ 2000	24.5 sq. ft.

Dim.	Description	Models		
		2210	2310	2410
A	Inlet Opening Height	19 3/4" (502mm)	18 1/16" (459mm)	15 7/16" (392mm)
B	Outer Housing Depth without Door	25 3/8" (645mm)	20 1/16" (509mm)	28 1/16" (713mm)
C	Inlet Opening Width	21 3/16" (538mm)	15 7/8" (403mm)	23 7/8" (606mm)
D	Unit Width	6 3/4" (171mm)	6 3/4" (171mm)	6 3/4" (171mm)
E	Outer Housing Depth with Door	27 3/8" (695mm)	22 1/16" (560mm)	30 1/16" (763mm)
F	Outlet Opening Width	21 3/16" (538mm)	15 7/8" (403mm)	23 7/8" (606mm)
G	Outlet Opening Height	19 3/4" (502mm)	18 1/16" (459mm)	15 7/16" (392mm)
H	Unit Height	22 1/16" (560mm)	20 3/8" (518mm)	17 3/4" (451mm)

The submittal is intended to show general, overall product dimensions and provide guidance for installation clearance. Drawings are not to scale. Ensure submittals are current.



5-year warranty on all installed products
 (warranty does not apply to filters)

