



## 300 PSIG Working Pressure

### Construction



Shell	ASME Approved Steel
Bladder Design	Full Acceptance; Replaceable
Bladder Thickness	.100 In Minimum
System Connection	NPTF Malleable Iron
Finish	Red Oxide Primer
Air Valve	Schrader Valve w/EPDM Seats
Factory Precharge	12 PSIG (.8 bar)

### Performance

Maximum Operating Temperature	240°F (115°C)
Maximum Working Pressure	300 PSIG (20.7 bar)
Warranty	1-Year

### Application

- For use in closed, non-potable hydronic heating and chilled water systems.
- Replaceable, full acceptance bladder design.
- Meets all ASME Code Section VIII, Division 1 standards.
- Available with optional sight glass and seismic restraints.
- Suitable in propylene glycol applications with mixtures up to 50%.

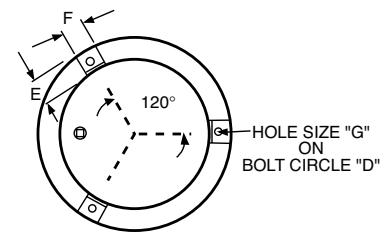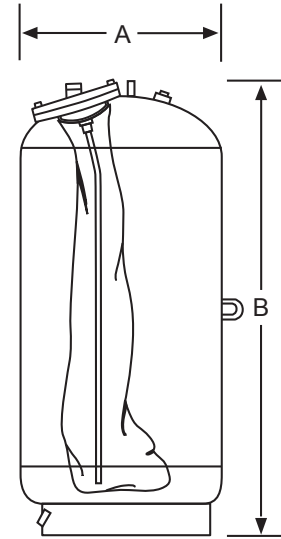

BOTTOM VIEW

### ASME Models

Model Number	Tank Volume		A Tank Diameter		B Tank Height		C Stand Diameter		System Conn. (NPTF)		Drain Conn.		Shipping Weight	
	Gal	Lit	In	mm	In	mm	In	mm	In	mm	In	mm	Lbs	Kg
200-L	53	200	24	610	38	956	19	483	1	25	3/4	19	297	135
300-L	80	300	24	610	52	1308	19	483	1	25	3/4	19	372	169
400-L	106	400	24	610	66	1662	19	483	1	25	3/4	19	595	270
500-L	132	500	24	610	79	2006	19	483	1	25	3/4	19	750	340
600-L	158	600	30	762	64	1619	24	610	1 1/2	38	1	25	810	367
800-L	211	800	30	762	82	2076	24	610	1 1/2	38	1	25	950	431
1000-L	264	1000	36	914	74	1867	30	762	1 1/2	38	1 1/4	32	1065	483
1200-L	317	1200	36	914	86	2181	30	762	1 1/2	38	1 1/4	32	1235	560
1400-L	370	1400	36	914	98	2496	30	762	1 1/2	38	1 1/4	32	1400	635
1600-L	422	1600	48	1219	69	1756	42	1067	1 1/2	38	1 1/2	38	2015	914
2000-L	528	2000	48	1219	84	2145	42	1067	1 1/2	38	1 1/2	38	2651	1202
2500-L	660	2500	48	1219	101	2562	42	1067	2	50	1 1/2	38	2715	1232
3000-L	792	3000	48	1219	118	3000	42	1067	2	50	1 1/2	38	3100	1406
3500-L	925	3500	54	1372	111	2820	42	1067	2	50	1 1/2	38	3780	1715
4000-L	1057	4000	54	1372	125	3175	42	1067	2	50	1 1/2	38	4285	1944
5000-L	1321	5000	60	1524	128	3251	42	1067	2	50	1 1/2	38	5200	2359
7500-L	1980	7500	72	1829	127	3226	54	1372	3	76	1 1/2	38	6750	3062
7500-LCAN	1980	7500	72	1829	144	3658	54	1372	3	76	1 1/2	38	6750	3062
10000-L	2640	10000	72	1829	159	4039	54	1372	3	76	1 1/2	38	11000	4990
15000-L	3963	15000	72	1829	233	5918	54	1372	3	76	1 1/2	38	12500	5670

### Optional Seismic Restraints

Tank Diameter	Bolt Circle	Dim. E	Dim. F	Hole Size
B	D	E	F	G
24	21	2	2	9/16
30	28	4	4	7/8
36	34	4	4	7/8
48	46	4	4	7/8
54	46	4	4	7/8
60	46	4	4	7/8
72	58	4	4	1

All dimensions and weights are approximate.

Job Name _____	Notes _____
Engineer _____	_____
Contractor _____	_____
P.O. No. _____	_____
Sales Rep. _____	_____
Model No. _____	_____

