

**Functional
Devices, Inc.**



Bulletin B1055 • 393091D

RIBMNWX2401SB-LN

CONTACT RATINGS

20A Res. @ 277 Vac
20A Ballast N/O @ 120/277 Vac
10A Ballast N/C @ 120/277 Vac
10A Tungsten N/O @ 120 Vac
1110 VA Pilot Duty @ 277 Vac
770 VA Pilot Duty @ 120 Vac
2 HP @ 277 Vac
1 HP @ 120 Vac

CONTACT OUTPUT

Terminals

POWER INPUT

24 Vac/dc
208-277 Vac

POWER INPUT RATINGS

24 Vac, 105mA Max
24 Vdc, 78mA Max
208-277 Vac, 120mA Max


CURRENT SENSE RANGE

0.25–20 Amps



PINK LED = Current Status
YELLOW LED = Service
RED LED = Relay Activated
GREEN LED = Network Status

Use insulated tool when actuating service button

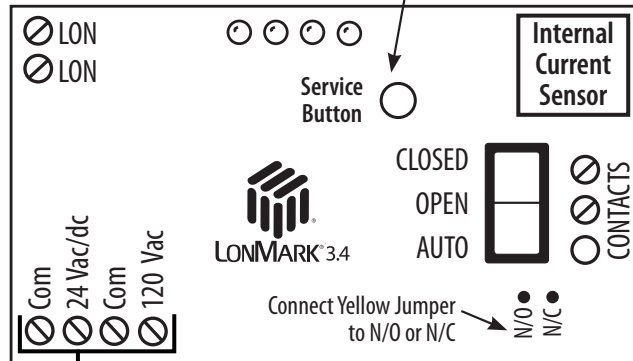

www.FunctionalDevices.com • 800.888.5538

FOR SUPPLY CONNECTIONS USE #12AWG WIRES OR LARGER RATED FOR AT LEAST 75°C(167°F).

CAUTION: RISK OF ELECTRIC SHOCK - MORE THAN ONE DISCONNECT MAY BE REQUIRED TO DEENERGIZE THE DEVICE BEFORE SERVICING.