

AGD4A

Air Gap Drains | For 2-1/2" - 12" Reduced Pressure Backflow Preventers





Job Name:	
Job Location:	
Engineer:	
Contractor:	
Tag:	
PO#:	
Rep:	
Wholesale Dist.:	

DESCRIPTION


Apollo' Air Gap Drains (AGD4Ax) are designed to funnel minor discharges from a Reduced Pressure Backflow Preventer's relief valve due to line pressure fluctuations and/or minor check valve fouling into the drainage system. Drainage piping is easily attached to the threaded portion of the AGD. The female NPT size is listed in the table under "Outlet Connection". Drainage piping may be attached with a coupling and the appropriate cement or with a flexible pipe coupling. Piping compatible with the outlet is listed in the table under "Outlet Pipe Size".


Air Gap Drains are NOT designed to collect the full discharge capacity of the relief valve. Please refer to page 3 for relief valve full discharge rates.


STANDARD MATERIALS LIST


AGD4A6	ABS and PVC
AGD4A8	ABS
AGD4A12	Epoxy Coated Steel
FASTENERS	Stainless Steel

AGD4A6 (2-1/2" - 6")










RP SIZE	AIR GAP PART NUMBER		DIMENSI	ONS (IN.)	OUTLET CONNECTION	WT.				
		Α	В	С	D	(FNPT)	(LB.)			
RP4A										
2-1/2"	AGD4A6	11.28	-	2.63	3.13	2"	0.7			
3"	AGD4A6	11.28	-	2.63	3.13	2"	0.7			
4"	AGD4A6	12.02	-	2.63	3.13	2"	0.7			
6"	AGD4A6	13.32	-	2.63	3.13	2"	0.7			
	RP4AN									
2-1/2"	AGD4A6	=	10.87	2.63	3.13	2"	0.7			
3"	AGD4A6	=	10.87	2.63	3.13	2"	0.7			
4"	AGD4A6	=	10.51	2.63	3.13	2"	0.7			
6"	AGD4A6	=	11.76	2.63	3.13	2"	0.7			




Air Gap Drains | For 2-1/2" - 12" Reduced Pressure Backflow Preventers

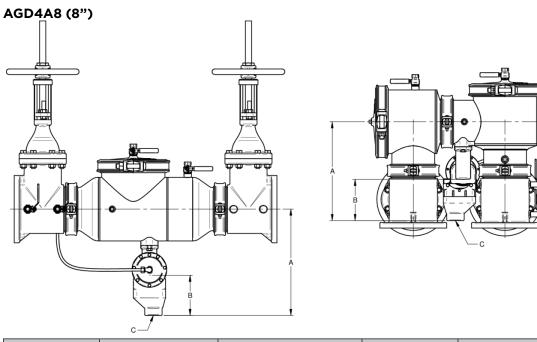

RP STYLE A	AIR GAP PART NUMBER	DIMENSIONS (IN.)		OUTLET PIPE SIZE	OUTLET CONNECTION	WT.
		Α	В	С	(FNPT)	(LB.)
RP4A	AGD4A8	21.3	9.1	3"	2-1/2"	1.5
RP4AN	AGD4A8	19.8	9.1	3"	2-1/2"	1.5

AGD4A12 (10" & 12")

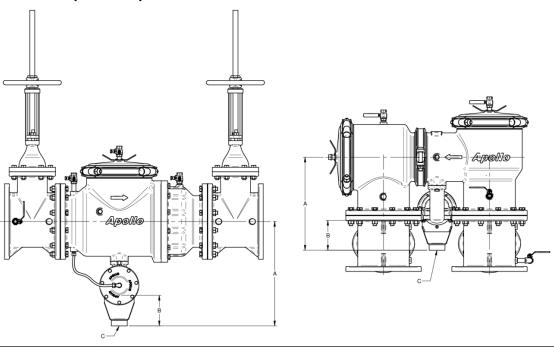

RP STYLE A	AIR GAP PART NUMBER	DIMENSIONS (IN.)		OUTLET PIPE SIZE	OUTLET CONNECTION	WT.
		Α	В	С	(FNPT)	(LB.)
RP4A	AGD4A12	26.3	7.7	4"	3"	5
RP4AN	AGD4A12	23.4	7.7	4"	3"	5



Air Gap Drains | For 2-1/2" - 12" Reduced Pressure Backflow Preventers

RP DISCHARGE RATES

