

CT240-01

Use a touchtone phone to heat your cottage or home just in time for your arrival

MODEL & RATINGS

CT240-01 1 low voltage output (12 VDC)
 1 universal relay output (dry contact)
 Both outputs operate simultaneously



*COMPATIBLE WITH THE FOLLOWING AUBE THERMOSTATS:
 TH115, TH135, TH140, TH141, TH144 Series, TH146 Series, TH148LE-P*


SPECIFICATIONS

POWER SUPPLY
 9 VAC / 60Hz (adapter and phone cable included)

OUTPUTS
 Low voltage output (12 VDC)
 Universal relay output
 5 A @ 30 VAC inductive P.F. 0.4
 10 A @ 30 VAC resistive
 10 A @ 120/240 VAC resistive (electrical box req.)

DIMENSIONS
 69 x 137 x 31 mm / 2.7 x 5.4 x 1.2 inches

INSTALLATION

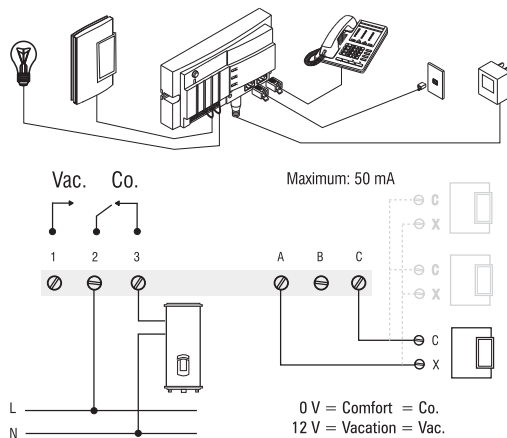

FEATURES

Low voltage output (1) works with Aube thermostats requiring a 12 VDC signal to activate unoccupied mode

Universal output (1) works with thermostats or household devices requiring dry contacts

Connects directly to existing phone line

Activated by home / cell phones and is compatible with answering machines

One-touch buttons enable manual override of controller output status

LEDs show output status

Password-protected for secure access

Battery-free backup saves user settings and output status after a power outage

