
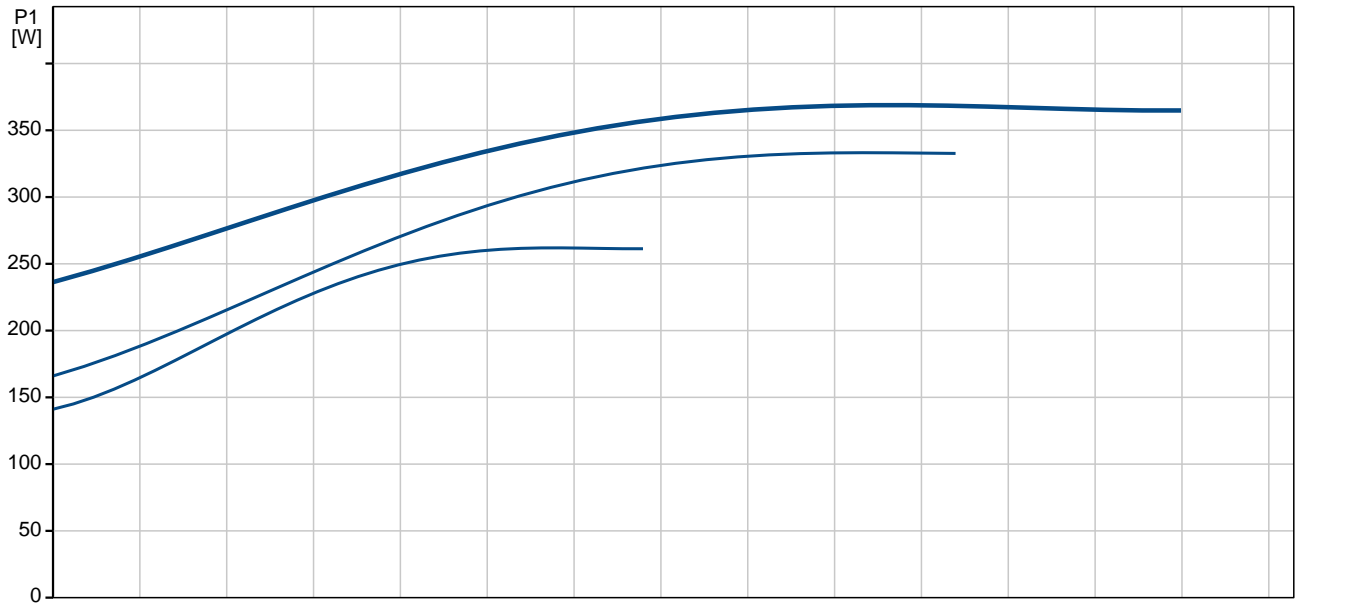
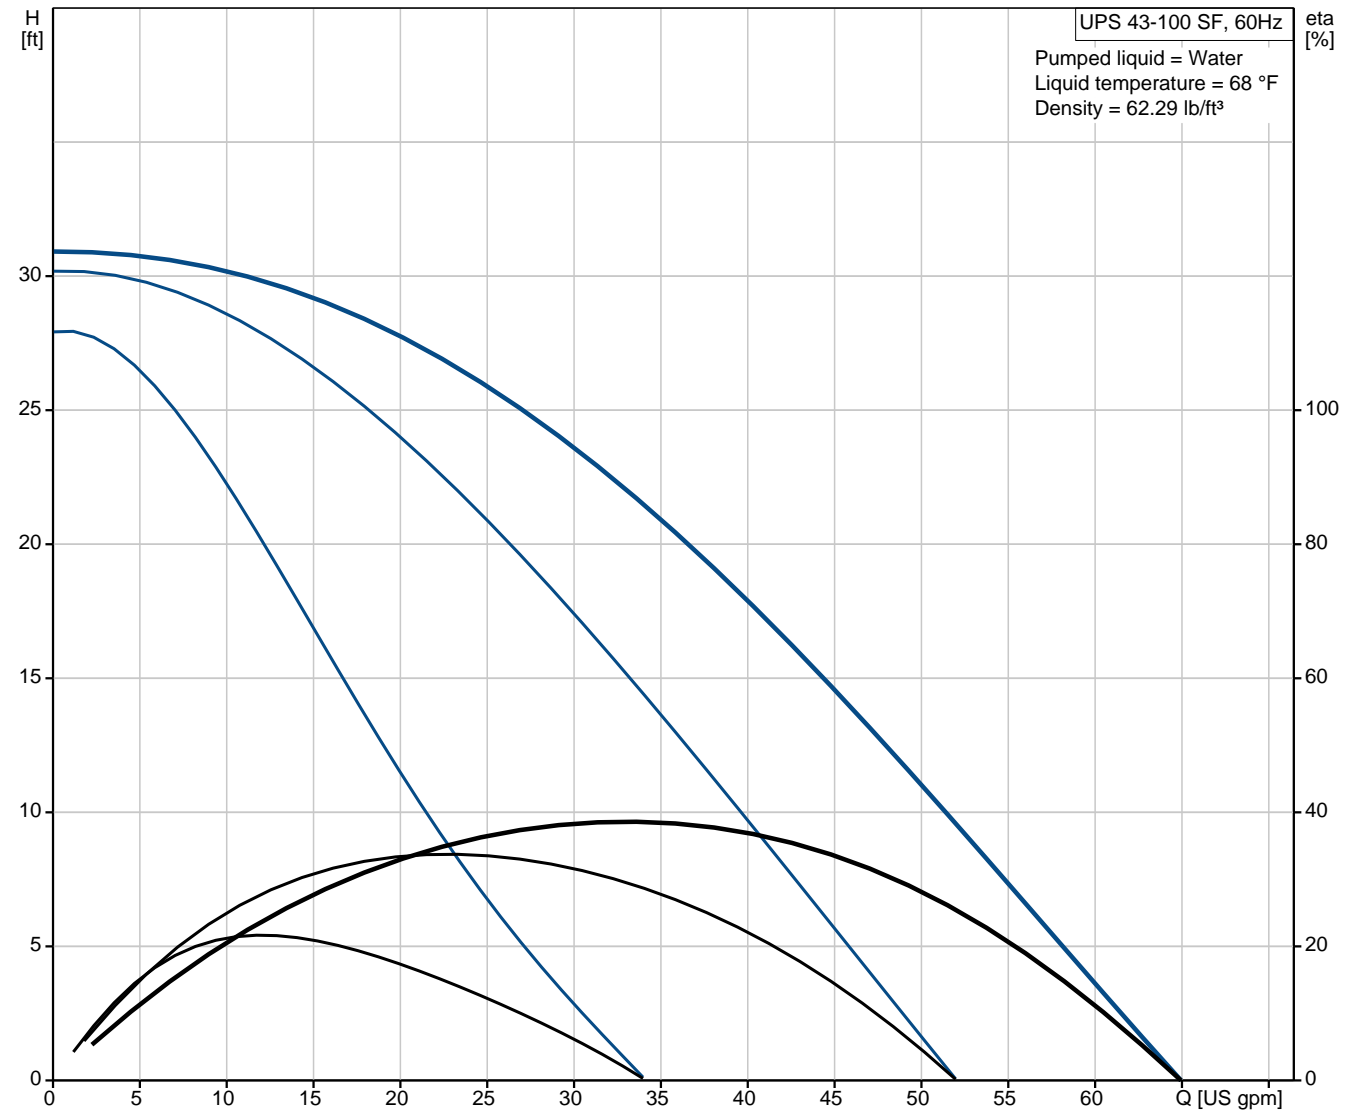




Position	Count	Description
	1	<p><b>UPS 43-100 SF</b></p>  <p style="text-align: center;">Product photo could vary from the actual product</p> <p>Product No.: <a href="#">95906638</a></p> <p>The pump is of the canned rotor type, i.e. pump and motor form an integral unit without shaft seal and with only two gaskets for sealing. The bearings are lubricated by the pumped liquid. The pump is characterized by:</p> <ul style="list-style-type: none"> <li>* Ceramic shaft and radial bearings.</li> <li>* Carbon axial bearing.</li> <li>* Stainless steel rotor can and bearing plate.</li> <li>* Corrosion-resistant impeller, Composite, PES.</li> <li>* Stainless steel pump housing.</li> </ul> <p>The motor is a 1-phase motor. No additional motor protection is required.</p> <p><b>Liquid:</b> Liquid temperature range: 32 .. 230 °F</p> <p><b>Technical:</b> Approvals on nameplate: ETL, CSA</p> <p><b>Materials:</b> Pump housing: Stainless steel DIN W.-Nr. 1.4301 Impeller: Composite, PES</p> <p><b>Installation:</b> Maximum ambient temperature: 104 °F Ambient max at 176°F liquid: 176 °F Maximum operating pressure: 145 psi Flange standard: USA Oval Type of connection: S.S. Flange Pipe connection: 2 - Bolt Flange Pressure stage: 10 Port-to-port length: 8 1/2 in</p> <p><b>Electrical data:</b> Number of poles: 2 C run: 40 µF Power input in speed 1: 265 W Power input in speed 2: 335 W Max. power input: 370 W Rated power - P2: 0.33 HP</p>

Position	Count	Description
		<p>Main frequency: 60 Hz</p> <p>Rated voltage: 1 x 115 V</p> <p>Current in speed 1: 2.5 A</p> <p>Current in speed 2: 3.1 A</p> <p>Current in speed 3: 3.5 A</p> <p>Capacitor size - run: 40 µF/180 V</p> <p>Insulation class (IEC 85): H</p> <p><b>Others:</b></p> <p>Gross weight: 17.7 lb</p>


# 95906638 UPS 43-100 SF 60 Hz



Description	Value
<b>General information:</b>	
Product name:	UPS 43-100 SF
Position	
Product No.:	95906638
EAN:	5700313291762
Price:	On request
<b>Technical:</b>	
Speed Number:	3
Max flow:	65 US gpm
Head max:	30.8 ft
Approvals on nameplate:	ETL, CSA
<b>Materials:</b>	
Pump housing:	Stainless steel
	DIN W.-Nr. 1.4301
Impeller:	Composite, PES
<b>Installation:</b>	
Maximum ambient temperature:	104 °F
Ambient max at 176°F liquid:	176 °F
Maximum operating pressure:	145 psi
Flange standard:	USA Oval
Type of connection:	S.S. Flange
Pipe connection:	2 - Bolt Flange
Pressure stage:	10
Port-to-port length:	8 1/2 in
<b>Liquid:</b>	
Liquid temperature range:	32 .. 230 °F
<b>Electrical data:</b>	
Number of poles:	2
C run:	40 µF
Power input in speed 1:	265 W
Power input in speed 2:	335 W
Max. power input:	370 W
Rated power - P2:	0.33 HP
Main frequency:	60 Hz
Rated voltage:	1 x 115 V
Current in speed 1:	2.5 A
Current in speed 2:	3.1 A
Current in speed 3:	3.5 A
Capacitor size - run:	40 µF/180 V
Insulation class (IEC 85):	H
Motor protection:	CONTACT
Thermal protec:	internal
<b>Controls:</b>	
Pos term box:	9H
<b>Others:</b>	
Gross weight:	17.7 lb

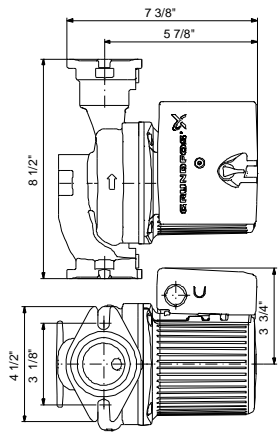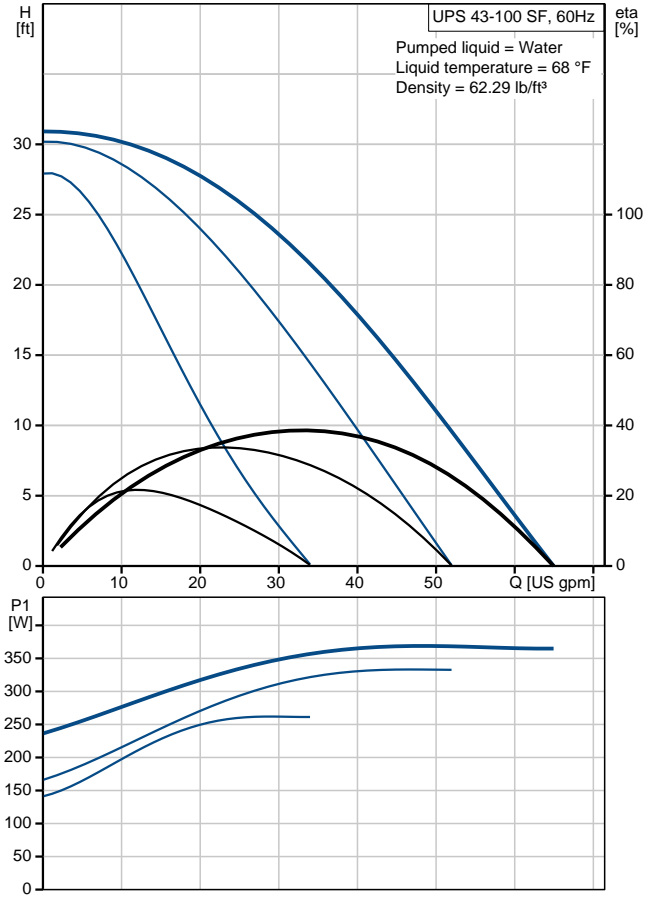

# 95906638 UPS 43-100 SF 60 Hz

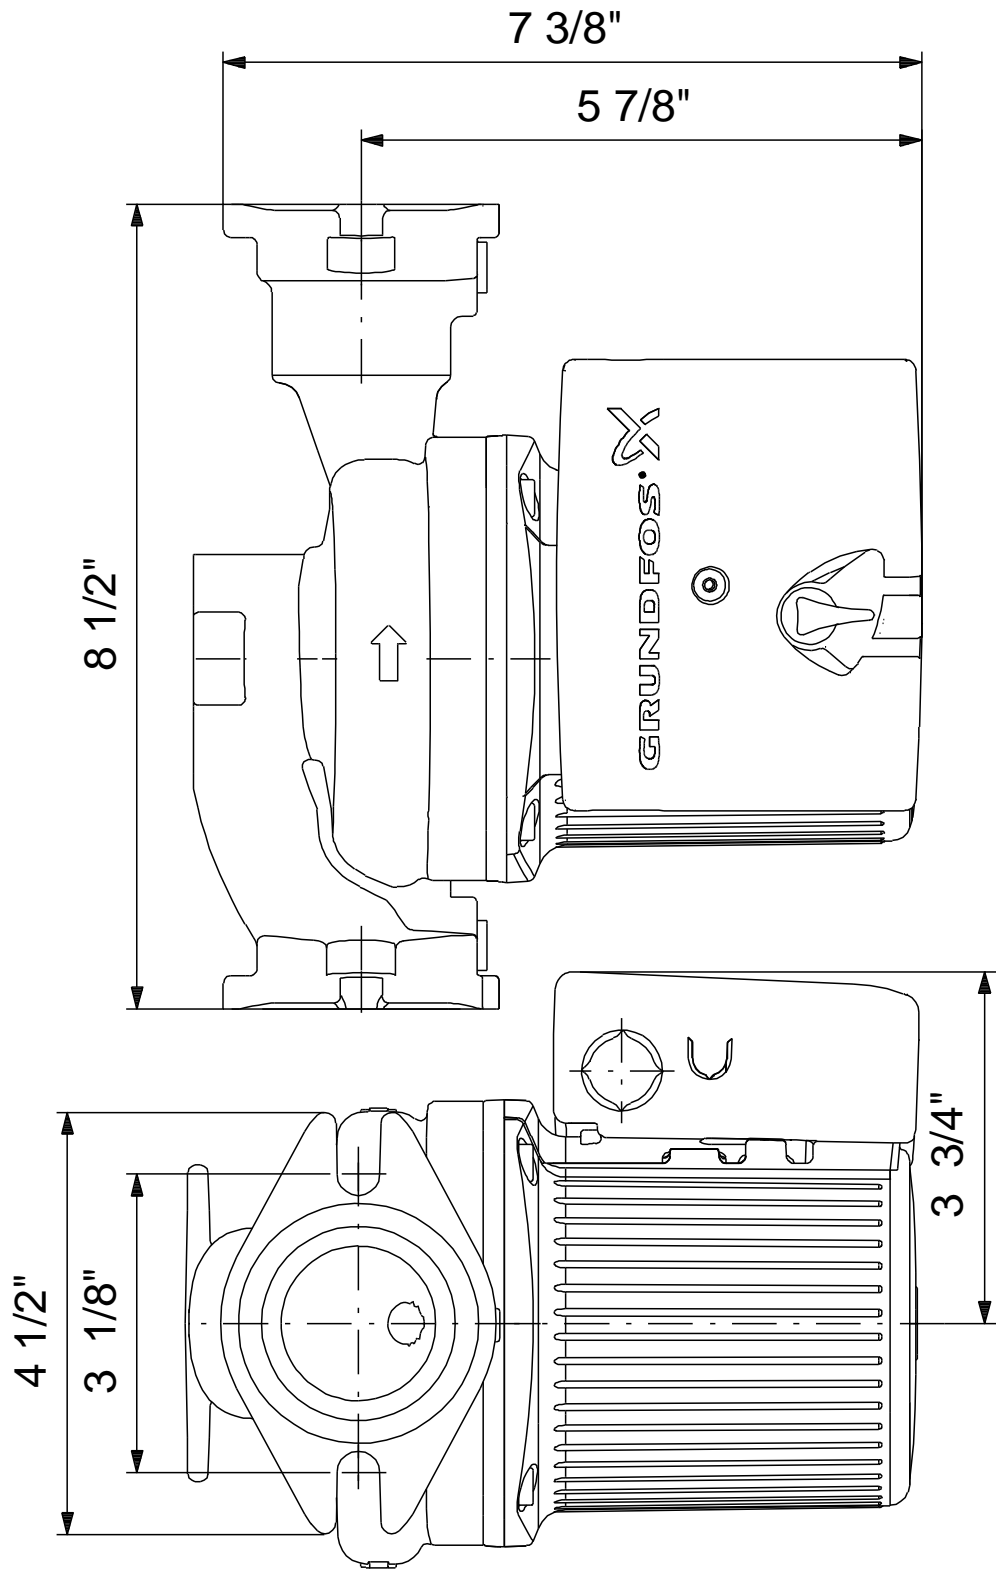

Note! All units are in [mm] unless otherwise stated.  
Disclaimer: This simplified dimensional drawing does not show all details.