



# MH-25

# R4.2 & R8

## Manufactured Housing Duct Insulated Flexible Air Duct

## PRODUCT DATA & SUBMITTAL

### PHYSICAL DESCRIPTION

**MH-25** (25' length) flexible duct is designed for manufactured housing, constructed with a spring steel wire helix, encapsulated in a 2-ply, air-tight inner-core. Fiberglass insulation (choice of R4.2 & R8) encompasses the core & a black heavy-duty polyethylene vapor barrier surrounds the entire duct.

### PRODUCT DATA

**Diameter:** 6", 8", 10", 12", 14" & 16"

**Length:** 25 feet.

**Packaging:** 1 25' section per poly-bag. To assure thermal properties, packaging complies with recommended 12:1 or less compression ratio.

**Vapor Barrier:** Heavy Duty, 4 mil Black Polyethylene.

**End Treatments:** Raw Ended.

**Inner Core:** Airtight 2-Ply Black Pigmented Polyester.

### PERFORMANCE DATA

**Thermal Value: R4.2 & R8** Classified by Underwriters Laboratories, Inc. and bears the ADC Thermal Certification Mark.

**Maximum Positive Pressure:** 6" W.G. (6" – 12")  
4" W.G. (14" – 16") determined per ADC Test FD-72R1 at elevated temperatures with a 90° elbow.

**Maximum Negative Pressure:** 1" W.G. (6" – 10")  
½" W.G. (12" – 16").

**Maximum Velocity:** 5,000 FPM.

**Operating Temperature:** -20°F to 140°F Continuous,  
-20°F to 200°F Intermittent.

**Permeance:** (Vapor – Barrier) .13 US Perms per  
ASTM E96A – 94.

### ADDITIONAL LENGTHS

MH Series is also available in additional lengths. Please contact the factory for pricing and minimum quantities.

### FEATURES & BENEFITS

UL Listed & Labeled

Meets HUD requirements

Guaranteed out of package lengths

10 Year limited warranty

GREENGUARD Gold Certification

Formaldehyde free (see [www.jpflex.com](http://www.jpflex.com) for more info)

3/8 oversize inner core


Certified R-Values

### CODE COMPLIANCE & APPROVALS

Listed & Labeled Underwriters Laboratories, Inc. File # MH11637 UL-181 Class 1 Air Duct, Flame Spread 25 or Less. Meets the requirements of HUD 3280.715 Circulating air systems for manufactured homes, NFPA 90A & 90B, UMC & IMC and most model codes. California Insulation Manufacturer #TD-1092



# AIR FRICTION LOSS DATA

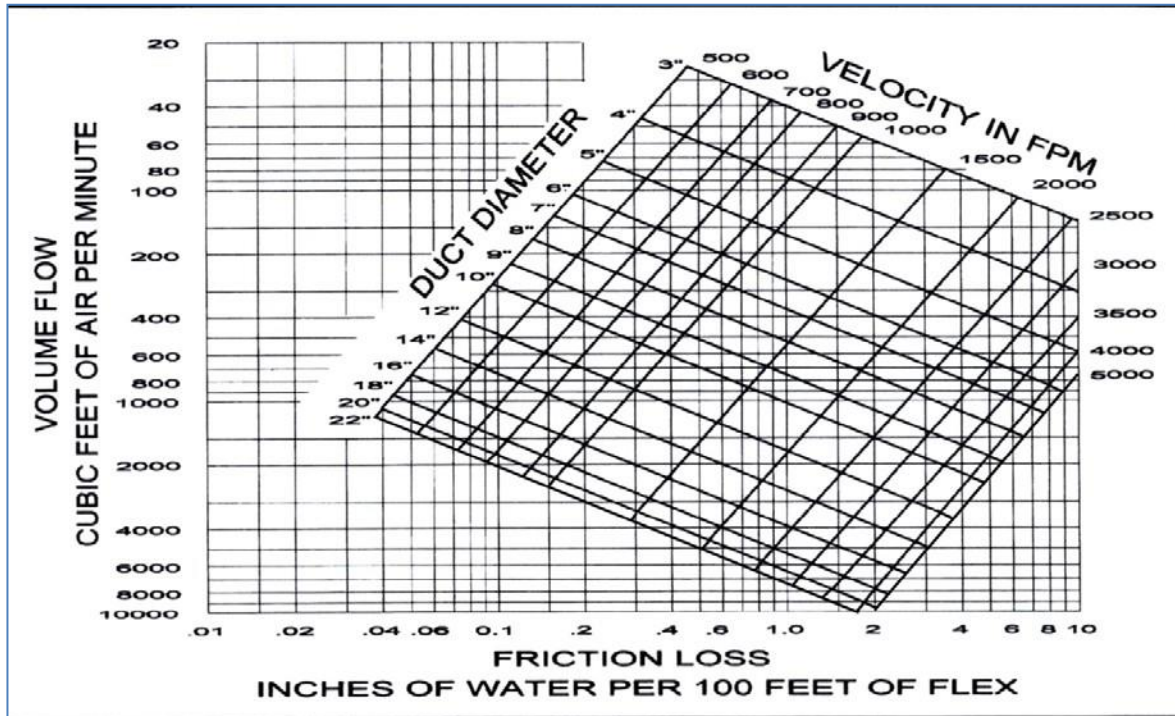

Friction Loss Slide Chart Calculators are available at a minimum cost



## TEN YEAR LIMITED WARRANTY

**JPL** warrants that all of its UL-181 Flexible Air Ducts & Thermal Sleeves (the "Product") will be free from defects in materials and workmanship under normal use for a period of ten (10) years from date of manufacture.\* This warranty shall apply only to the Product when installed in the U.S.A. in accordance with **JPL** written installation instructions and within the conditions and limitations of the published performance data.

\*Contact Company for details and limitations



**HARDI** resources that fuel your competitive advantage  
Heating, Air-conditioning & Refrigeration Distributors International



◆ Specifications subject to change without notice. ◆

Proper use and installation of these products shall be in accordance with UL-181 and ADC recommended installation instructions in each package.