





## T805

#### **Pro1 Technologies**

P.O. Box 3377

Springfield, MO 65808-3377

Toll Free: 888-776-1427 Web: www.pro1iaq.com

Hours of Operation: M-F 9AM - 6PM Eastern


# Table of ContentsPageTable of Contents1Thermostat Operation2-3Thermostat Quick Reference4-7Programming8-11Features12-14Warranty Information15

Una version en español de este manual se puede descargar en la pagina web de la compañia.



#### **Caution**

Equipment damage hazard. Do not operate the cooling system if the outdoor temperature is below 50 °F (10 °C) to prevent possible compressor damage.

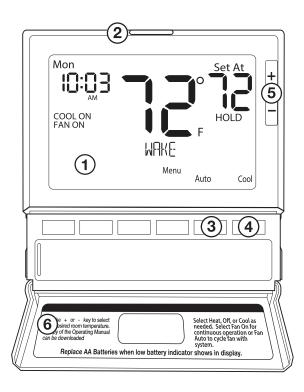

1 LCD Display

See page 6 for details about this display read out.

(2) Glow in the dark light button
The glow in the dark light

The glow in the dark light button will self illuminate for several hours after exposure to ambient light. This button turns on the display light when pressed.

(3) Fan Button

Select **ON**, **AUTO** or **IAQ**. The **ON** setting will run the fan continuously. The **AUTO** setting will cycle the fan on only when the heating or cooling system is on. IAQ will enable **IAQ FAN MODE**, if selected.

4) System Button


Selects the operation mode on your **HVAC** system.
Selecting **HEAT** turns on the heat mode. Selecting **COOL** turns on the cool mode. Selecting **OFF** turns both heating and cooling off. Selecting **AUTO** will turn the **HEAT** or **COOL** on as needed.

5 Temperature Setpoint Buttons

Press the \_+ or \_- buttons to select the desired room temperature.

6 Button / Battery Door
See page 4 for further information.

#### **Battery Door Information**

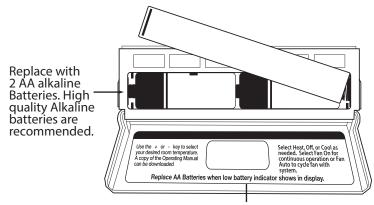

Simple operating instructions are found on the back of the battery door.




#### **Caution:**

When the battery icon batteries immediately. Failure to do so may result in your heating & cooling system becoming inoperable. Freezing or overheating can occur.



#### **Important:**

The low battery icon is displayed when the AA battery power is low. Whenever the thermostat detects low battery voltage from the AA batteries, the low battery icon will begin flashing on the screen for 21 days (if the batteries are not changed). If the batteries are not changed 22 days after the thermostat detects low battery voltage, the thermostat screen will only show the flashing battery icon until buttons are pressed. If the batteries are not changed 43 days after the thermostat detects low battery voltage, the thermostat screen will only show the flashing battery icon until buttons are pressed and the set points will offset to 85°F/29°C in cooling and 55°F/13°C in heating. At this stage, set point changes can be made temporarily but, the set points will change back to defaulted values after a 4-hour period. The thermostat will continue to perform this low battery flashing, temperature offset condition until the internal voltage threshold is reached. When the thermostat internal voltage threshold is reached, all relays will be opened and the thermostat will become inoperable until new batteries are installed.

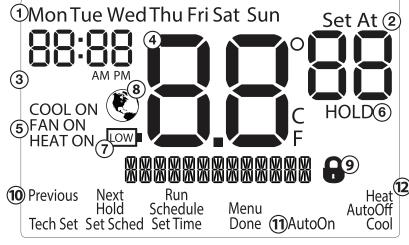

- 1 Day of the week
- (2) Heating Setpoint: Displays the user selectable setpoint temperature.
- (3) Time and day of the week

- (4) Indicates current room temperature
- 5) Indicates if heating or cooling equmipment is running
- **6) Hold Indicator:** Displayed when the thermostat is inpermanent hold
- 7 Low Battery Indicator
- 8 Energy Efficient Leaf: Indicates the setpoint termperature chosen is an efficient choice.
- (9) **Keypad Lockout:** Indicates the thermostat is in keypad lockout
- **10 Program Menu Buttons:** Shows different options during programming.
- **11) Fan Button:** Changes the fan operation between Auto, IAQ, and On.
- **System Button:** Changes the system operation between Off, Cool, Auto, Heat, and Emergency Heat based on system tech setting.

#### **Set Time** (If using programming)

Follow the steps below to set the day of the week and current time:

- 1. Press the **MENU** button.
- 2. Press SET TIME.
- 3. Day of the week will be flashing. Use the \_\_\_\_ or \_\_\_ key to select the current day of the week.
- 4. Press NEXT STEP.
- **5.** The current hour is flashing. Use the \_\_\_\_\_ or \_\_\_\_ key to select the current hour. When using 12-hour time, make sure the correct a.m. or p.m. choice is selected.
- 6. Press NEXT STEP.
- 7. Minutes are now flashing. Use the \_\_\_\_\_ or \_\_\_\_ key to select current minutes.
- **8.** Press **DONE** when completed.

#### **Important:**

You will see a **TECH SETUP** option after the **MENU** key is pressed. This **TECH SETUP** key is for installer configuration and should **NOT** be changed unless you consult your professional heating and air conditioning technician.

#### **Set Program Schedule For Four Time Periods**

(WAKE, LEAVE, RETURN, SLEEP)

To customize your 5+1+1 Program schedule, follow these steps: Weekday:

- 1. Select **HEAT** or **COOL** with the system switch. **Note:** You have to program heat and cool each separately.
- 2. Press the MENU button (If menu does not appear first press RUN SCHED).
- **3.** Press **SET SCHED**. **Note:** Monday-Friday **(Monday if in 7day)** is displayed and the **WAKE** icon is shown. You are now programming the **WAKE** time period for that day.
- 5. Press NEXT STEP.
- **6.** The setpoint temperature is flashing. Use the + or key to make your setpoint selection for that day's **WAKE** period.
- 7. Press NEXT STEP.
- Repeat steps 4 through 7 for that day's LEAVE time period, RETURN time period, and SLEEP time period.

Programming Programming

#### **Saturday:**

Repeat steps 4 through 7 for the Saturday **WAKE** time period, for the Saturday **LEAVE** time period, for the Saturday **RETURN** time period, and for the Saturday **SLEEP** time period.

#### **Sunday:**

Repeat steps 4 through 7 for the Sunday **WAKE** time period, for the Sunday **LEAVE** time period, for the Sunday **RETURN** time period, and for the Sunday **SLEEP** time period.

To customize your 7 day Program Schedule, repeat steps 4 through 8 for the Tuesday, Wednesday, Thursday, Friday, Saturday and Sunday time periods.

#### A Note About Programmable Fan:

The programmable fan feature will run the fan continuously during during any time period when it is programmed to be on. This is the best way to keep the air circulated and to eliminate hot and cold spots in your building.

Features Features

#### **Temporary & Permanent Hold Feature**

**Temporary Hold:** The thermostat will display **HOLD** and **RUN SCHED** on the bottom of your screen when you press the + or - key. If you do nothing, the temperature will remain at this setpoint temporarily for 4 hours. After this, the program setpoint will then replace your temporary setpoint.

**Permanent Hold:** With a temporary hold set, if you press the **HOLD** key at the bottom of your screen, you will see **HOLD** appear below the setpoint temperature in the display. The thermostat will now permanently stay at this setpoint and can be adjusted using the **+** or **-** keys.

**To Return To Program:** Press the **RUN SCHED** key at the bottom of your screen to exit temporary and permanent holds.



#### **Keypad Lockout Note:**

If appears in the display, then the keypad is locked. All or some of the keys will not work. Hold the + and - keys for 3 seconds to remove the lock. Use the same procedure to lock the display

#### A Note About Auto Changeover:

When in Auto you have the ability to switch between auto heat or auto cool by pressing the system key. This can be done once the current mode has reached its setpoint. For example: if in auto heat, the heat setpoint must be satisfied before the thermostat will allow you to switch to auto cool. You can switch out of auto by holding down the system key. To get back into auto, you must toggle the system key to auto.

#### **Warranty Information**

#### **Filter Change & Other Reminders**

A copy of the Operating Manual

If your HVAC contractor has configured the thermostat to remind you when the air filter needs changed, you will see a reminder in the display when your air filter needs to be changed.

**Resetting The Filter Change Reminder:** When the reminder is displayed, you should change your air filter and reset the reminder by holding down the **Set Time/Next Step** button of the thermostat for 3 seconds.

Replace AA Batteries when low battery indicator shows in display

continuous operation or Fan

Auto to cycle fan with

#### **Warranty Registration**

Your new thermostat has a 5 year limited warranty. You must register your thermostat within 60 days of installation. Without this registration the warranty period will begin on the date of manufacture. For warranty issues please contact the HVAC professional that installed this product. You can register your new thermostat in 2 ways:

#### Online

Go to the company website, select warranty registration and fill out a short registration form.

#### Mail

Complete the form below and mail it to the address shown.

Thormactat Madali

P.O. Box 3377

Springfield, MO 65808-3377

### **Warranty Registration**

Name of

Zip:

Name	memostat Model.
Address:	Date Installed:
City: State:	Complete form and mail to: Thermostat Warranty Registration
7:	Pro1iag

Cut Out For Warranty Registration

