


DC POWER SUPPLY: 120 VAC OR 24 VAC TO 1.5 - 28 VDC



PSM24A24DAS

4.00" & 2.75" Track Mount Isolated Linear DC Power Supply, **24 Vac** to 1.5-28 Vdc, 300 mA Adjustable Output

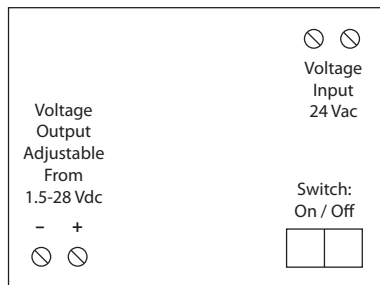

PSM19A24DAS

4.00" & 2.75" Track Mount Isolated Linear DC Power Supply, **120 Vac** to 1.5-28 Vdc, 300 mA Adjustable Output

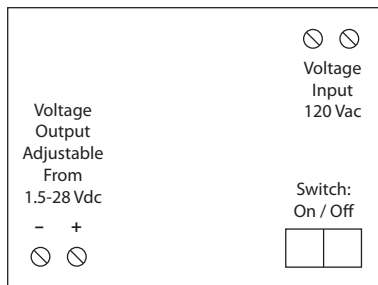

SPECIFICATIONS

Voltage Input: 24 Vac (PSM24A24DAS)
120 Vac (PSM19A24DAS)

Voltage Output: 1.5 - 28 Vdc Isolated

Frequency: 50/60 Hz

Overload Protection: Electrical and Thermal, Auto-Reset

Operating Temperature: -30 to 140° F

Humidity Range: 5 to 95% (noncondensing)

Power Status: LED On = Activated

Dimensions: 1.625" x 2.750" x 4.000"

Track Mount: 4.000" and 2.750" MT212-4 Mounting Track Supplied

Weight: 1.10 lbs.

ON/OFF Switch: 2 Position

Approvals: Class 2 (UL Approved UL5085-3), UL916, C-UL, CE, RoHS

Output Current Ratings:
116 mA @ 10 Vdc
125 mA @ 12 Vdc
300 mA @ 24 Vdc

Input Current Rating:
950 mA Maximum (PSM24A24DAS)
150 mA Maximum (PSM19A24DAS)

Percent Ripple:
0.0016%, 24 Vdc @ 300 mA

Regulation:
Load: 0.04% No Load to Full Load
Line: 0.0080 mV/V (PSM24A24DAS)
Line: 0.6250 mV/V (PSM19A24DAS)