


Firetube performance, perfected.

**SVF**<sup>™</sup> | **STAINLESS  
VERTICAL  
FIRETUBE**

- Industry-leading thermal efficiency up to 97.1%
- Stainless steel firetube heat exchanger
- Advanced **Unity**<sup>™</sup> control
- Easy to install and service
- Weil-McLain reliability

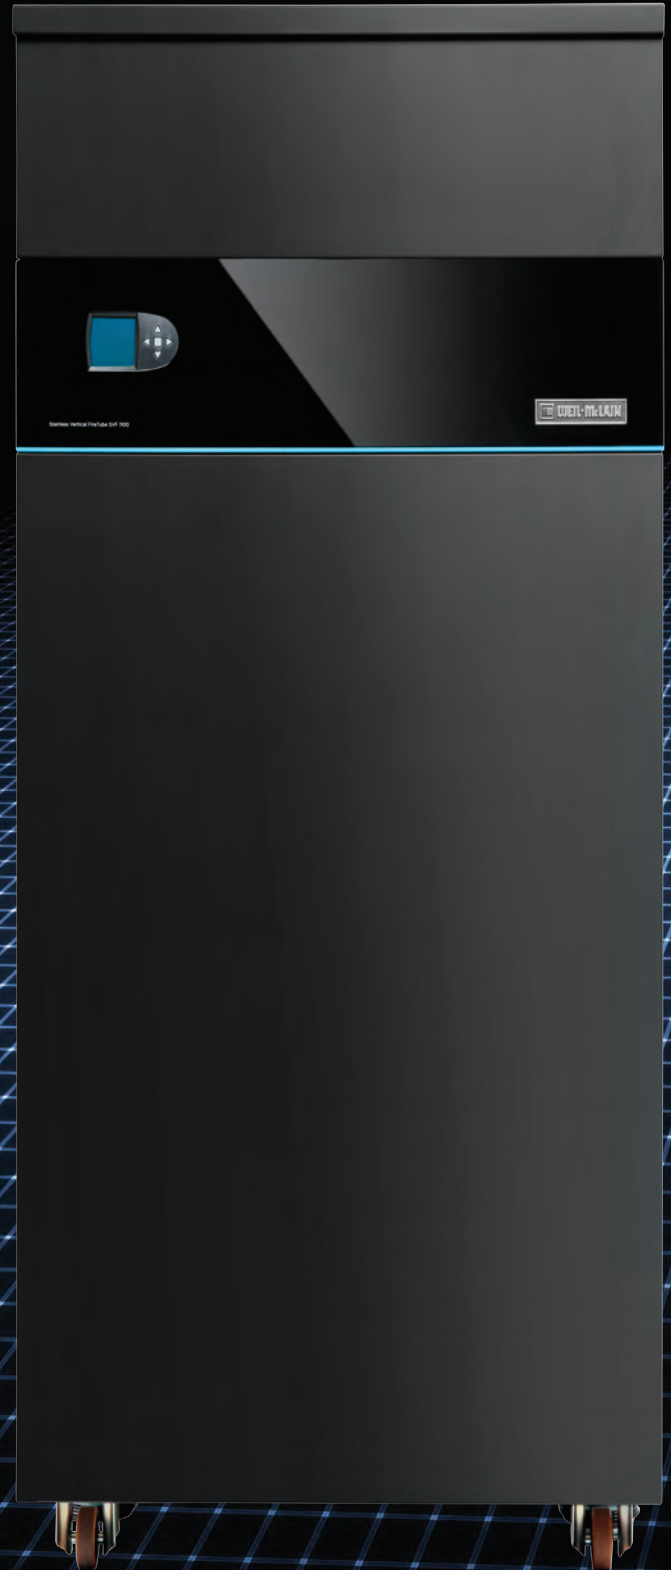

# Firetube performance, perfected.

The latest in thermal heating technology unifies leading-edge efficiency, control and durability in one complete package. Introducing the Weil-McLain SVF 750 and SVF 1100 firetube commercial boilers. For boiler replacement or new construction, it satisfies even the most demanding bid specs.

## The complete bid spec

Who says you can't have it all? Our uniquely designed SVF products cover all the necessary bid specs for new construction.

- ASME Certification
- Industry-leading efficiency
- Vertical firetube design
- 100% stainless steel heat exchanger and shell
- 5:1 turn down ratio
- Natural gas/propane
- 160 psi working pressure
- Installation and service ease
- Low NOx emissions
- Full line of venting options
- **Unity™ user-friendly and system compatible controls**
- **“Door-Fit” design**
- **Corrosion protection/resistance solution**
- **Weil-McLain reliability**

## Industry-leading efficiency

Featuring a proprietary clover-shaped, firetube design, the SVF heat exchanger provides greater surface area for maximum heat transfer to deliver industry-leading thermal **efficiencies up to 97.1%** (model dependent).



Clover firetube design

## Effortless control

SVF's **Unity™** control combines advanced technology with intuitive, user-friendly design.




Unity™ control

- Built-in set-up wizard makes every install simple, straightforward and customizable, even in hybrid applications
- Up to 8 boiler sequencing to meet a wide range of system demands
- Common control logic communicates with Weil-McLain Evergreen®, SlimFit® and SVF™ boilers (70-2000 MBH)

## Corrosion-resistance and longevity

Durability is built into every Weil-McLain boiler and the SVF series is no different. Multiple advances in anti-corrosion technology virtually guarantee long-lasting, reliable heat exchanger performance.

- 316 stainless steel heat exchanger and shell
- Vertical firetube design
- Replaceable, integrated condensate tray
- Industrial-grade, steel frame and jacket panels

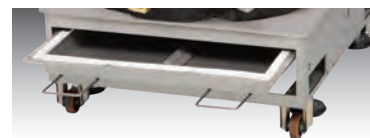


Replaceable condensate tray



## Installation ease

The new SVF boiler streamlines set-up and installation, saving time, labor and money.

- Fast removal shipping crate with integral ramp design
- Heavy-duty roller casters - no forklift requirements
- Unit fits through any standard-size door
- Industrial grade leveling legs
- Low-profile, burner design minimizes required overhead work space to only 18 inches

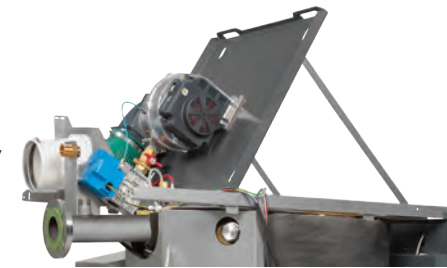

Hinged cover plate

## No-hassle maintenance

Easy maintenance is another hallmark of the SVF series. Service calls are stress-free for any trained Weil-McLain technician.

- Hinged cover plate allows for quick access to burner and firetubes
- Simple, vertical wash down of heat exchanger
- Open back panel design
- No side access required for service
- Fast jacket panel removal of top and front panels




End-shot burner design



**Contact** your Weil-McLain representative or visit [www.weil-mclain.com](http://www.weil-mclain.com) to learn more.

# Dimensions and Product Specifications

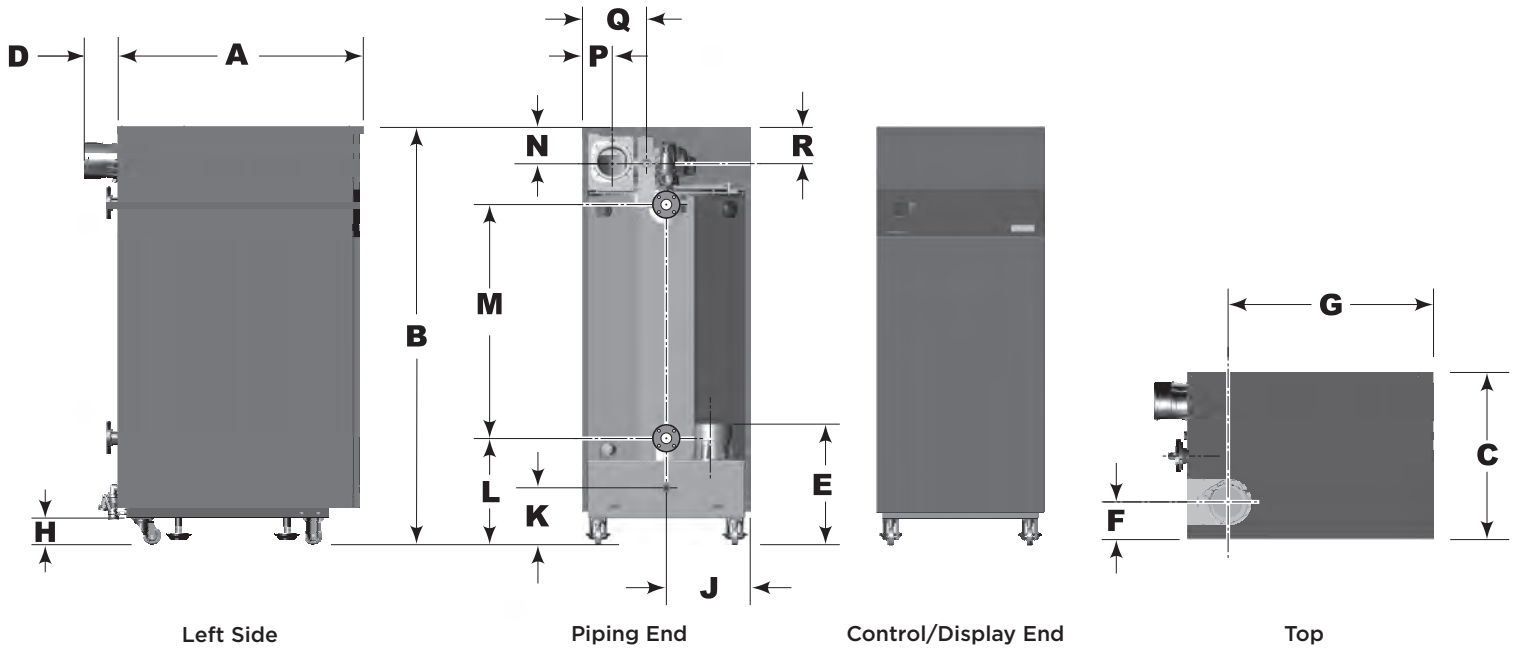

Model No.	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R
<b>SVF 750</b>	46 1/16"	79 3/8"	31 5/8"	6 5/16"	22 15/16"	6 7/8"	38 11/16"	5 1/4"	15 3/4"	11"	20 3/8"	44 3/8"	6 7/16"	5 1/4"	12"	6 15/16"
<b>SVF 1100</b>	50 7/8"	79 3/8"	35 9/16"	5 11/16"	22 15/16"	7 3/16"	42 13/16"	5 1/4"	17 3/4"	11"	20 3/8"	43 3/4"	6 7/16"	5 5/16"	13 9/16"	5 7/16"

Model No.	Thermal Efficiency	Max Pressure (psi)	Max Input (MBH)	Gross Output (MBH)	Net AHRI Rating (MBH)	Turn Down	Water Conn	Gas Conn	Air/Intake Vent Size	Length	Width	Height	Shipping Weight (lbs)
<b>SVF 750</b>	96.3%	160	785	756	657	5:1	2" Flange	1 1/4"	6"	46.5"	31.5"	79.1"	1,565
<b>SVF 1100</b>	97.1%	160	1,134	1,101	957	5:1	3" Flange	1 1/4"	6"	51.0"	35.4"	79.1"	1,875

## Industry Leading Efficiency

- Up to 97.1% Thermal Efficiency\*
- ASME Certified Stainless Steel Firetube Heat Exchanger and Shell
- "Clover" tube design for max heat transfer
- 160 psi Working Pressure
- 30 psi Relief Valve
- Pickled and Passivated Welded Design

## Modulating, Low Emissions Burner Design

- Natural Gas or Propane
- Down to <20 ppm NOx Emissions\*
- 5:1 Turndown Ratio
- Low Gas Pressure Operation
- Direct Spark Ignition
- Variable Speed Blower Assembly
- Venturi Mixing System
- Negative Pressure Regulated Gas Valve
- 50 VA Transformer
- Temperature & Pressure Gauge
- Outdoor Water Temp. Sensor
- Outlet & Inlet Water Temp. Sensor
- Flue Gas Temp. Sensor
- System Water Temp. Sensors
- Immersion Style - Supply & Return

## Venting Options

- Direct Exhaust - Sidewall & Vertical (CAT II)
- Direct Vent - Sidewall, Vertical, & Side Intake with Vertical Exhaust (CAT II)
- Direct Exhaust - Vertical (CAT IV)

\*model dependent

## Complete Jacket Assembly

- Fully Removable Jacket
- Rugged, Steel Frame & Panels
- Manual Reset Push Button through Display

## Easy Install / Serviceability

- Easy Set-up with Control Wizard
- Industrial-Grade Roller Casters
- Shipping Crate Ramp
- Hinged Cover Plate
- "Door-Fit" Design
- Zero-Clearance to Combustibles
- Low-Profile, Stainless Steel Burner with Woven Steel Fiber Mesh
- Removable, Stainless Steel Condensate Tray
- Single-Point Installation
- All Field Connections out Back of Boiler

## Multiple Boiler Features

- Up to 8 Boilers, Multiple System functionality with Lead/Lag Capability
- Series, Parallel, or Smart Sequencing™
- Lead Boiler Rotation
- Variable Primary Flow Design Capable
- (3) Boiler Priorities Capability
- Either (2) network and (1) local or (1) network and (2) local
- (24) Zone Inputs and Outputs with (8) Total Cascaded
- Boiler via Zone Stacking™
- Aux Inputs - Flow End or Switch End
- System Aux Outputs - System Pump or Damper

## Control Features

- 120 VAC / 60 Hertz / 1 Phase
- Operating Status Color LCD Display
- Preset Operating Parameters Including Typical Heating Systems
- Configurable Outdoor Reset
- Rate Setting for Each Input/Output
- 0-10V Input (Modulation or Set Point)
- Standard Modbus Connectivity
- Additional Heat Demand Functionality
- Contact with 0-10V Output
- Labeled Terminal Blocks for Field Terminations
- Ignition Control
- High Limit & Modulating Temp. Control
- Alarm Control Functionality
- Onboard Time & Date
- Low Water Cut-Off
- Manual Reset
- Warm Weather Shutdown
- Freeze Protection
- Boiler Service Interval & Contractor Info

## CS-D-1 Compliant

- Manual Reset LWCO
- Manual Reset High & Low Gas Pressure Switches
- UL 353 Certified High Limit Control with Manual Reset
- UL 353 Certified Operating Control

## Non-Pro-Rated Warranty

- 10 Year Heat Exchanger Warranty
- 2 Year Parts Warranty

## Optional Equipment

- Pressure Relief Valve - 30 / 50 / 80 / 100 / 150 psi
- System Water Temp. Sensors
- Strap-On - Supply & Return
- Annual Maintenance Kit
- BacNet or LonWorks Converter Kit
- Corrosion Inhibitor
- Condensate Neutralizer Kit
- Anti-Freeze

## Boiler Certifications

- ASME IV, CSA, AHRI, Commercial Energy Star, SCAQMD

*In the interest of continual improvements in product and performance, Weil-McLain reserves the right to change specifications without notice.*

**Weil-McLain offers BIM-Revit product content to help architects, engineers and contractors design projects accurately and efficiently.**



www.weil-mclain.com