

SUBMITTAL SHEET

JOB NAME _____

LOCATION _____

ARCH./ENGR. _____

WHOLESALER _____

MECH. CONTRACTOR _____

MODEL NO. _____ GAS TYPE _____

BTU/HR INPUT _____ BTU/HR OUTPUT _____

NOTES _____

Standard Equipment

Complete Bid Spec:

- Industry leading, AHRI Certified 98.0% Thermal Efficiency
- Industry-leading efficiency
- Counter-flow firetube design
- 100% stainless steel heat exchanger and shell
- Up to 12:1 turn down ratio*
- Natural gas
- 160 psi working pressure
- Installation and service ease
- Low NOx emissions
- Full range of venting options
- User friendly controls with advanced diagnostics
- “Door-Fit” design
- Weil-McLain reliability

Improved Efficiency

Advanced design 100% stainless steel heat exchanger with robotic welds provides greater surface area to for maximum heat transfer and ensured reliability.

Unity 2.0 Controller

- Color Touchscreen Display
- Easy-Navigate Logic
- Intuitive Prompts and Functionality
- 8 Boiler cascade and communication
- Before/after fault detection data logging

Corrosion-Resistance and Longevity

Durability is built into every Weil-McLain boiler and the SVF series is no different. Multiple advances in anti-corrosion technology virtually guarantee long lasting, reliable heat exchanger performance.

- 316 stainless steel heat exchanger and shell
- Vertical firetube design
- Industrial-grade, steel frame and jacket panels

Installation Ease


- The new SVF boiler streamlines set-up and installation, saving time, labor and money
- Fast removal shipping crate with integral ramp design
- Unit fits through any standard-size door
- Heavy-duty roller casters — no forklift requirements
- Industrial grade leveling legs
- Zero-clearance boiler-room capable

No-hassle Maintenance

- Easy maintenance is another hallmark of the SVF series. Service calls are stress-free for any trained Weil-McLain technician
- Quick access/removal cover plate allows for quick burner and firetubes inspection
- Simple heat exchanger wash-down
- No side access required for service
- Convenient and fast jacket panel removal



SVF 500-600 Dimensions and Product Specifications

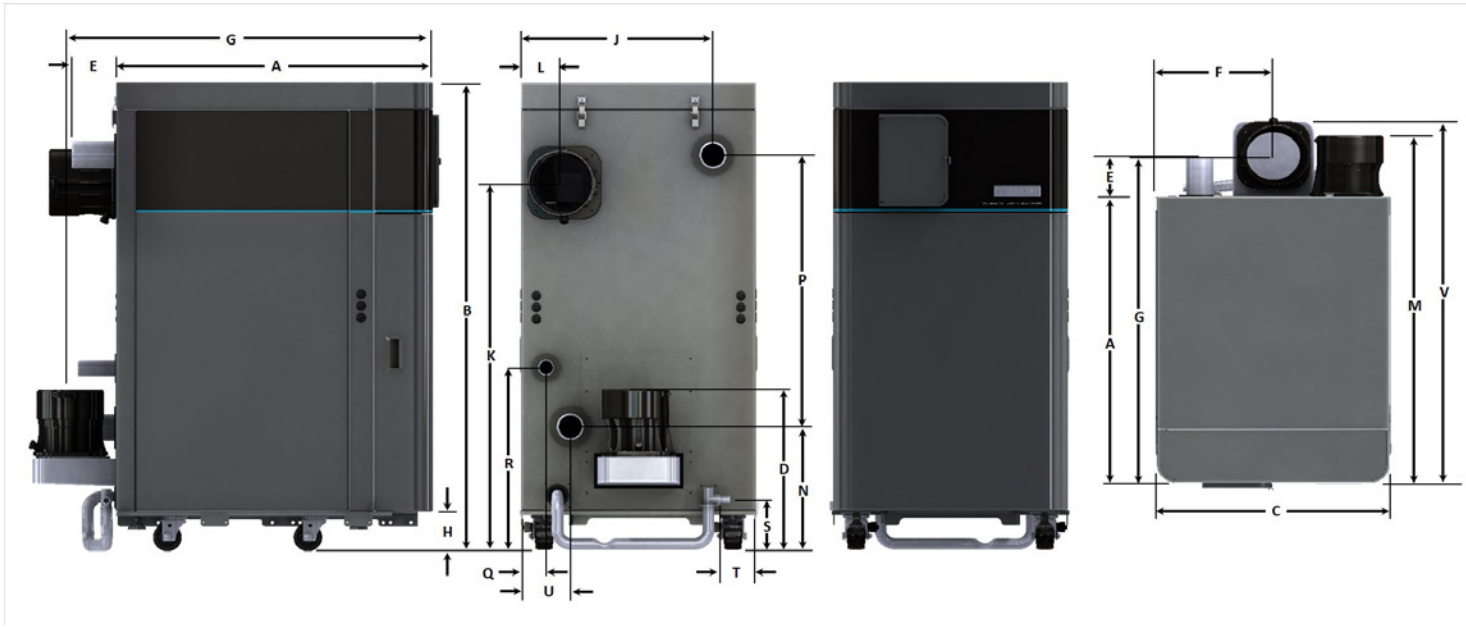

Model No.	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	U	V
SVF 500 600	33-3/8"	49-13/16"	24-7/8"	17-1/4"	4-3/4"	12-1/16"	38-3/16"	4-4/16"	20-5/16"	39-3/16"	4-9/16"	42-1/8"	13-3/16"	29"	2-5/8"	19-1/2"	5-3/8"	3-13/16"	5-1/4"	42-3/16"

Model No.	Minimum Thermal Efficiency	Max Pressure (psi)	Max Input (MBH)	Max output (MBH)	Turn Down	Water Volume (gal)	Water Conn	Gas Conn	Air/Intake Vent Size	Length	Width	Height	Shipping Weight
SVF 500	98.0%	160	500	490	10:1	12	2"	1 1/4"	4"	42 3/16"	24 7/8"	49 3/16"	572
SVF 600	98.0%	160	600	588	12:1	12	2"	1 1/4"	4"	42 3/16"	24 7/8"	49 3/16"	572

Industry Leading Efficiency

- Up to 98% Thermal Efficiency*
- ASME Certified Stainless Steel Firetube Heat Exchanger and Shell
- Advanced Design Firetube Geometry with Robotic Weldments for Maximum Heat Transfer and Reliability

Standard Features

- Natural Gas
- Up to 12:1 Turndown Ratio*
- 160 psi Working Pressure
- 30 psi Relief Valve
- Low Gas Pressure Operation
- Direct Spark Ignition
- Variable Speed Blower Assembly
- Negative Pressure Regulated Gas Valve
- Temperature & Pressure Gauge
- Outdoor Temp. Sensor
- Outlet & Inlet Water Temp. Sensor
- Flue Gas Temp. Sensor
- System Water Temp. Sensors
 - Immersion Style—Supply & Return

CS2-1 Compliant

- Manual Reset LWCO
- Manual Reset High & Low Gas Pressure Switches
- UL 353 Certified High Limit Control with Manual Reset
- UL 353 Certified Operating Control

Complete Jacket Assembly

- Fully Removable Jacket
- Rugged, Steel Frame & Panels

Easy Install/Serviceability

- Easy Set-up with Control Wizard
- Industrial-Grade Roller Casters and Leveling Legs
- Shipping Crate Ramp
- "Door-Fit" Design
- Zero-Clearance to Combustibles
- Stainless Steel Burner with Woven Fiber Mesh
- Single-Point Installation
 - All Field Connections (Excludes Gas/Front) Out Back of Boiler

Venting Options

- Direct Exhaust — Vertical (CAT II)
- Direct Vent — Sidewall, Vertical, & Side Intake with Vertical Exhaust (CAT IV)
- Direct Exhaust — Vertical (CAT IV)

Optional Equipment

- Pressure Relief Valve — 50/80/100/150 psi
- System Water Temp. Sensors
 - Strap-On — Supply & Return
- BACnet or LonWorks Converter Kit
- Annual Maintenance Kit
- Corrosion Inhibitor
- Condensate Neutralizer Kit
- Anti-Freeze

Unity 2.0 Controller

- Color Touchscreen Display
- Easy-Navigate Logic
- Intuitive Prompts and Functionality

Control Features

- Zone and/or Priority-Based Control
- Ten Preloaded System Types including Custom-Design
- 0-10V Input (Modulation of Setpoint)
- Outdoor Reset for Each Priority
- Rate Adjustment per Priority
- Individually Fused 120V Outputs
- Warm Weather Shutdown
- System Match Blower Control with Rapid Response
- Rectified Flame Detection for Supervision and Boost Override
- 24 Hour Operational Trend Collection
- Before/After Fault Detection Data Logging

Boiler and Building Management System Compatible

- Variable Speed Boiler Pump Control for Variable/Primary Applications
- 8-Boiler Sequencing
- Modbus Communication
- Additional Heat Demand Output for Hybrid System Control

Boiler Certification

- ASME IV, CSA, AHRI, Commercial Energy Star, SCAQMD

Non-Pro-Rated Warranty

- 10 Year Heat Exchanger Warranty
- 2 Year Parts Warranty

In the interest of continual improvements in product and performance, Weil-McLain reserves the right to change specifications without notice.

Weil-McLain offers BIM-Revit product content to help architects, engineers and contractors design projects accurately and efficiently.

*model dependent



Solutions that Matter™

www.weil-mclain.com

