

AprilAire

Air Cleaner

SPECIFICATION SHEET

Model 1910

Whole-Home Air Cleaner

FEATURES

- Ships with MERV 11 filter
- Can be upgraded to MERV 13 filter with simple filter change
- Minimal maintenance required – filter lasts up to one year
- Made of corrosion-resistant heavy gauge galvanized steel
- Proprietary door design and Self-Seal™ media virtually eliminates air bypass, delivering MERV performance as rated
- UL listed air cleaner
- UL classified filters
- Load rated up to 400 lbs.
- 5-year warranty on cabinet from date of installation



BENEFITS


- Offers equipment protection from dust buildup
- Assured equipment performance
- Superior performance over one-inch panel filters and four-inch cartridge filters

PRODUCT SPECIFICATIONS

Model 1910	Nominal Size (in Inches)	Shipping Weight	MERV 11				MERV 13					
			Replacement Filter	Resistance @ Airflow Volume (in. w.c. @ CFM)		Shipping Weight (full carton)	Filtering Area	Replacement Filter	Resistance @ Airflow Volume (in. w.c. @ CFM)		Shipping Weight (full carton)	Filtering Area
	25 x 20	18 lbs.	Ships With Model 910	.03"@400	.12"@1200	28 lbs.	25.9 sq. ft.	Also Uses Model 913	.04"@400	.17"@1200	28 lbs.	25.9 sq. ft.
				.05"@600	.15"@1400							
				.07"@800	.18"@1600				.10"@800	.25"@1600		
				.09"@1000	.22"@1800				.13"@1000	.30"@1800		
				.27"@2000					.35"@2000			

REMOVAL EFFICIENCY (Based on Particle Size)

	0.3 - 1.0 Microns	1.0 - 3.0 Microns	3.0 - 10 Microns
MERV 13	63%	88%	93%
MERV 11	37%	67%	92%

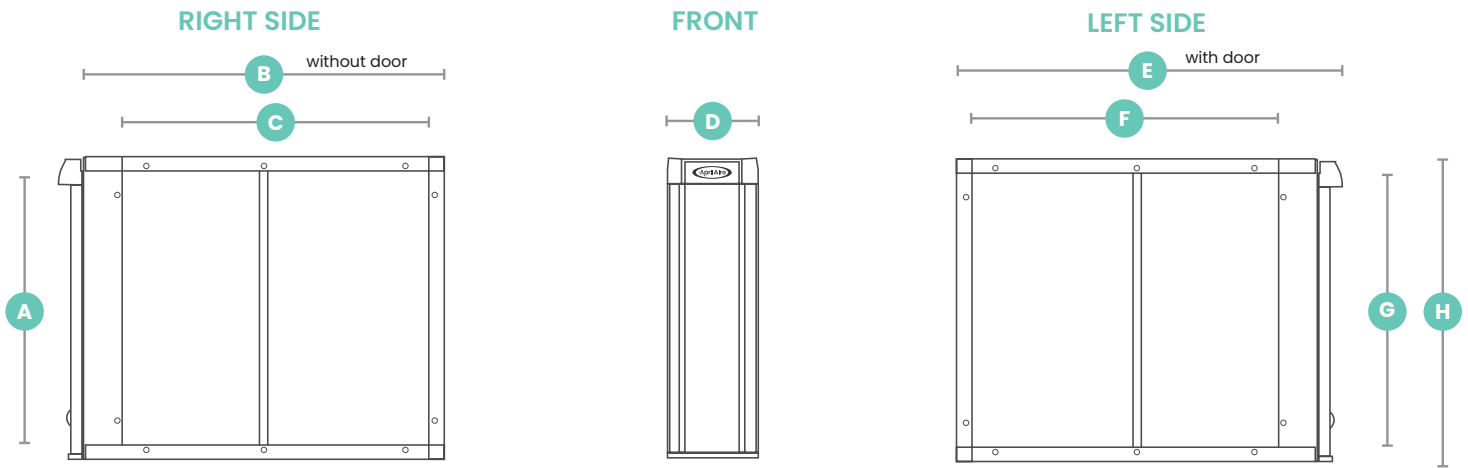

Dim.	Description	Model 910
A	Inlet Opening Height	22 ³ / ₄ " (578mm)
B	Outer Housing Depth without Door	20 ¹ / ₁₆ " (510mm)
C	Inlet Opening Width	15 ⁷ / ₈ " (403mm)
D	Unit Width	6 ³ / ₄ " (171mm)
E	Outer Housing Depth with Door	22 ¹ / ₁₆ " (560mm)
F	Outlet Opening Width	15 ⁷ / ₈ " (403mm)
G	Outlet Opening Height	22 ³ / ₄ " (578mm)
H	Unit Height	25 ¹ / ₁₆ " (637mm)

REPLACEMENT FILTERS





Healthy Air 11
Vacuum & Dust Less Often





910

Model 910 MERV 11 PERFORMANCE





Healthy Air 13
Removes Most Common Allergens





913

Model 913 MERV 13 PERFORMANCE