


LD Series

Silencer for circular ducts

STANDARD FEATURES

- Insulation thickness 2 inches
- Galvanized steel

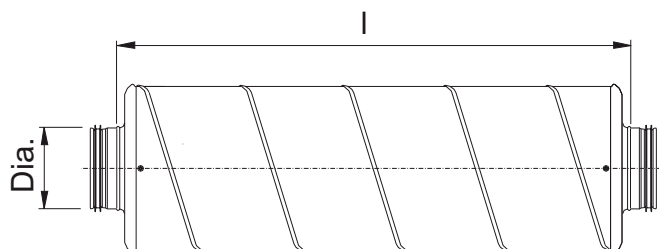

Model	Ø Dia.	Outside Ø	L (Length)	Metal Gauge	Avg Weight
LD 4	4	8	23 ⁵ / ₈	22	11
LD 5	5	9	23 ⁵ / ₈	22	12
LD 6	6	10 ¹ / ₄	23 ⁵ / ₈	22	15
LD 8	8	12 ¹ / ₂	23 ⁵ / ₈	22	18
LD 10	10	14	35 ¹ / ₂	22	32
LD 12	12	17 ³ / ₄	35 ¹ / ₂	22	44
LD 14	14	22 ¹ / ₂	35 ¹ / ₂	22	44
LD 16	16	25	35 ¹ / ₂	22	125

All dimensions in inches. Weights in pounds.

Model	Item #	Noise suppression dB (mid-frequency Hz)								QTY	# ACC
		63 Hz	125 Hz	250 Hz	500 Hz	1k Hz	2k Hz	4k Hz	8k Hz		
LD 4	411282	4	3	11	24	36	49	34	17		
LD 5	411283	3	3	9	23	30	40	22	14		
LD 6	411284	-	3	7	20	27	31	16	11		
LD 8	411125	2	3	7	16	21	23	9	8		
LD 10	411286	3	4	8	20	26	23	9	8		
LD 12	411287	1	3	7	16	22	12	6	7		
LD 14	483558	-	3	6	13	18	10	6	7		
LD 16	411288	1	3	5	10	13	7	5	6		

Accessorie Name	Item #	QTY	Accessorie Name	Item #	QTY
1.			5.		
2.			6.		
3.			7.		
4.			8.		

Contacts

Submitted by: _____	Date: _____
Quantity: _____ Model: _____	Project #: _____
Comments: _____	
Location: _____	
Architect: _____	
Engineer: _____	Contractor: _____

Distributed by:

United States 10048 Industrial Blvd. • Lenexa, KS 66215 • 1.800.747.1762 • www.fantech.net
Canada 50 Kanalfakt Way • Bouctouche, NB E4S 3M5 • 1.800.565.3548 • www.fantech.net

Systemair reserves the right to modify, at any time and without notice, any or all of its products' features, designs, components and specifications to maintain their technological leadership position.

