


**AC POWER SUPPLY**

**PSC40AB10**

Enclosed Single 40 VA Power Supply, 120 to 24 Vac

**PSC100AB10**

Enclosed Single 100 VA Power Supply, 120 to 24 Vac

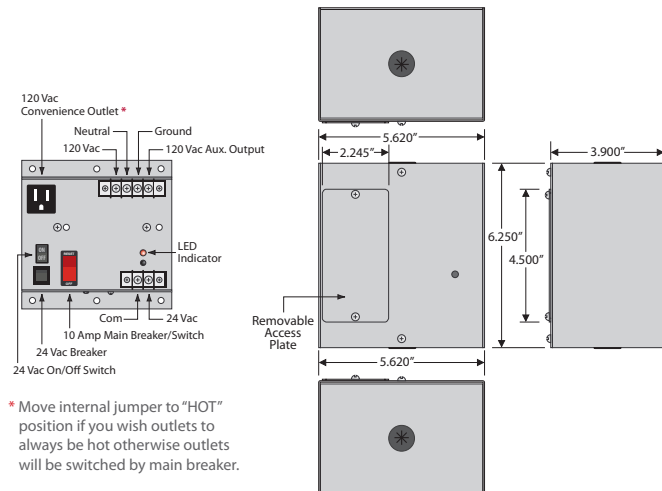

\* Move internal jumper to "HOT" position if you wish outlets to always be hot otherwise outlets will be switched by main breaker.



LISTED Class 2



Made in USA Meets "Buy American" of ARRA 2009

POWER SUPPLIES

**SPECIFICATIONS**

**Transformer:** One 40 VA Split-Bobbin, Inherently Limited (PSC40AB10)  
One 100 VA Split-Bobbin, Circuit Breaker (PSC100AB10)

**Primary:** 120 Vac

**Secondary:** 24 Vac, w/ LED Indicator

**Frequency:** 50/60 Hz

**24 Vac ON/OFF:** On / Off Switch & Breaker

**Main Breaker ON/OFF:** Switch / Breaker (10 Amp) (Kills power to entire unit: Outlets, Aux. Output, & Transformer)\*  
Total Combined Output 9A

**Mounting:** Mounting plate included (as shown)

**Approvals:** Class 2 (UL Approved UL5085-3), UL916, UL508, C-UL, CE, RoHS

**Dimensions:** 6.250" x 5.620" x 4.250"

**Weight:** 4.40 lbs. (PSC40AB10)  
5.80 lbs. (PSC100AB10)

**Notes:**

- To order without enclosure, see PSB40AB10 & PSB100AB10.
- To order UL508, add "-IC" to end of model number.