



AC POWER SUPPLY

PSH75A Series

Enclosed Single 75 VA Power Supplies, 480/277/240/208/120 to 24 Vac



* Move internal jumper to "HOT" position if you wish outlets to always be hot otherwise outlets will be switched by main breaker.

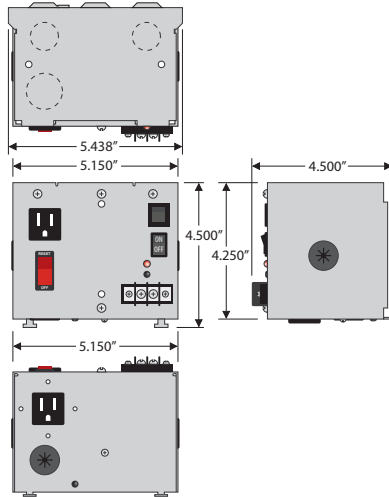

PSH75A SERIES SELECTION GUIDE

Model #	120 Vac Outlets	Aux Output Wire	Main Breaker on Input Power	Secondary Configuration
PSH75A	-	-	-	External Terminal Strip
PSH75AN	-	-	-	External Terminal Strip
PSH75ANW	-	-	-	Internal Wires
PSH75AW	-	-	-	Internal Wires
PSH75AB10*	-	-	10 Amp Switch / Breaker	External Terminal Strip
PSH75ANB10*	-	-	10 Amp Switch / Breaker	External Terminal Strip
PSH75ANWB10*	-	-	10 Amp Switch / Breaker	Internal Wires
PSH75AWB10*	-	-	10 Amp Switch / Breaker	Internal Wires

POWER SUPPLIES

SPECIFICATIONS

- Transformer:** One 75 VA Split-Bobbin
- Over Current Protection:** Circuit Breaker
- Frequency:** 50/60 Hz
- 24 Vac ON/OFF:** On / Off Switch & Breaker
- Main Breaker ON/OFF:** Switch / Breaker (10 Amp)
(Kills power to entire unit: Outlets, Aux. Output, & Transformer)*
- Approvals:** Class 2 (UL Approved UL5085-3), UL916, C-UL, CE, RoHS, Special
^ Seismic Certification of Equipment and Components: OSP-0201-10
- Dimensions:** 4.500" x 5.438" x 4.500"
- Weight:** 4.500 lbs.

- Input Wires:** "B10" Models Only
Input Power Wires
BLK: 120 Vac
WHT: Neutral
GRN: Ground
Outlet Wires
BLK: 120 Vac
WHT: Neutral
GRN: Ground

- All Other Models**
Primary Wires**
GRY: 480 Vac
BRN: 277 Vac
ORG: 240 Vac
RED: 208 Vac
WHT: 120 Vac
BLK: Common

- Output Wires:** "B10" Models Only
Auxiliary Output
BLU: 120 Vac

- "W" Models Only**
Transformer Output
WHT/YEL: 24 Vac
WHT/BLU: Common

- Notes:**
 - Output derating may exceed 20% due to elevated ambient temperature or heat buildup in device over time.
 - Design is in accordance with ASCE 7-05 Chapter 13: ^
www.oshpd.ca.gov/FDD/Pre-Approval/OSP-0201-10.pdf
 - All primary voltages other than 120 Vac will result in the disabling of convenience outlets.**