


# Universal Single Stage Furnace Control for PSC Blower Motors



50M56U-843

Replaces over 400 single stage HSI controls with 80V or 120V ignitors

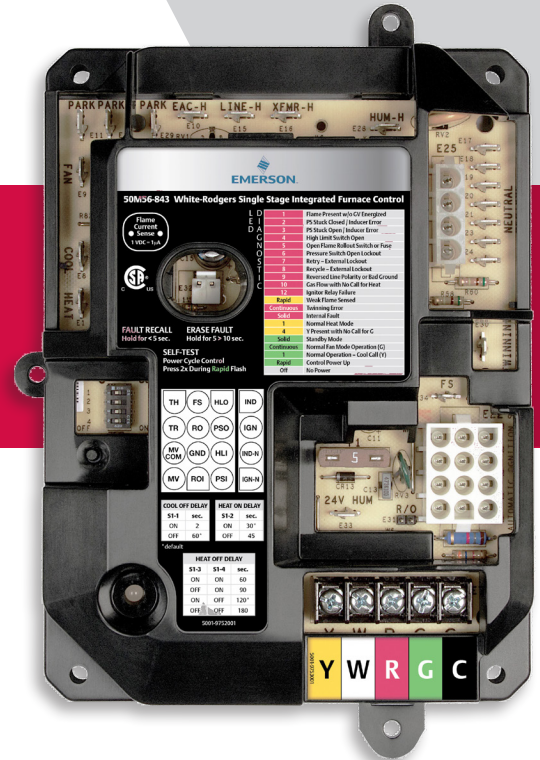

## Universal Replacement Kit

- Ignition control 50M56-843
- Quick-connect wiring harnesses
- HotRod™ Universal Ignitor Kit 21D64-2
- Installation instructions and OEM cross reference



## Easy Installation

- Mounting design fits all OEM models
- Simple Rollout jumper
- 75% of all applications install without adapter harnesses
- 24V or 120V humidifier



## Advanced Diagnostics

- Simple pushbutton fault recall
- Tri-Color LED & status codes
- Flame current test pins
- Fault code label on control



## Included

HotRod™ Universal Ignitor Kit 21D64-2

For ECMx blower motors use 50X57-843

# Universal Single Stage Furnace Control for PSC Blower Motors

50M56U-843 Replaces over 400 single stage HSI controls with 80V or 120V ignitors

## COMPETITIVE COMPARISON

Choose White-Rodgers for maximum cross reference and ease of installation

FEATURES	WHITE-RODGERS	BRAND X
For single stage & psc blower	✓	✓
Cross references	400	200
Ignitor voltage serviced	80V & 120V	120V
Blower delay dipswitches	4	4
Tri-color LED displays	✓	✓
Rollout accessory	Easy jumper	Wire
Flame test pins/pads	✓	✗
Full cover	✓	Tray
Fault code label	✓	✗
Fault recall & clearing	Simple pushbutton	Jumper R & D terminals
Electronic air cleaner output	✓	✓
Humidifier output	24V or 120V	120V
Fuse, twinning, test mode	✓	✓

## SPECIFICATIONS:

### Electrical Rating [@ 77°F (25°C)]

Input Voltage: 25 VAC 50/60 Hz

Max Input Current: 0.45 amp @ 25 VAC

### Flame Current Requirements

Minimum current to insure flame detection: .25 µa DC\*

Maximum current for non-detection: 0.1 µa DC\*

Maximum allowable leakage resistance: 100 M ohms

\* Measuring with a DC voltmeter (1 VDC = 1µa)

### Operating Temperature Range

-40° to 176° F (-40° to 80° C)

### Timing Specifications

(All times are in seconds unless noted otherwise)

Pre-purge	Ignitor warm-up (adaptive)	Retries	Post-purge	Lockout time	Heat ON delay	Heat OFF delay	Cool ON delay	Cool OFF delay	Auto reset	Flame establishment	Flame failure response
15	17-19	4 times	5	5 mins	30*/45	60/90/120*/180	2	2/60*	60 mins	0.8	2.0

\* Denotes factory default

R-4819

©2018 Emerson Electric Co. • White-Rodgers and Emerson are trademarks of Emerson Electric Co. All rights reserved • Customer Service or Technical Help: 888-725-9797

Emerson.com/White-Rodgers

### Humidity Range

5 - 95% relative humidity (non-condensing)

### Gases Approved

Natural, Manufactured, Mixed, Liquefied Petroleum, and LP Gas-Air Mixtures are all approved for use

### Dimensions

5.625" W x 8.25" L x 1.50" D (with tabs)

5.25" W x 7.0" L x 1.50" D (tabs removed)

### Agency Approvals

CSA - USA/Canada

### 1 Year Limited Warranty



Download the app for product information